


\*Customer Approval: \_\_\_\_\_ First Article:  Required  Waived

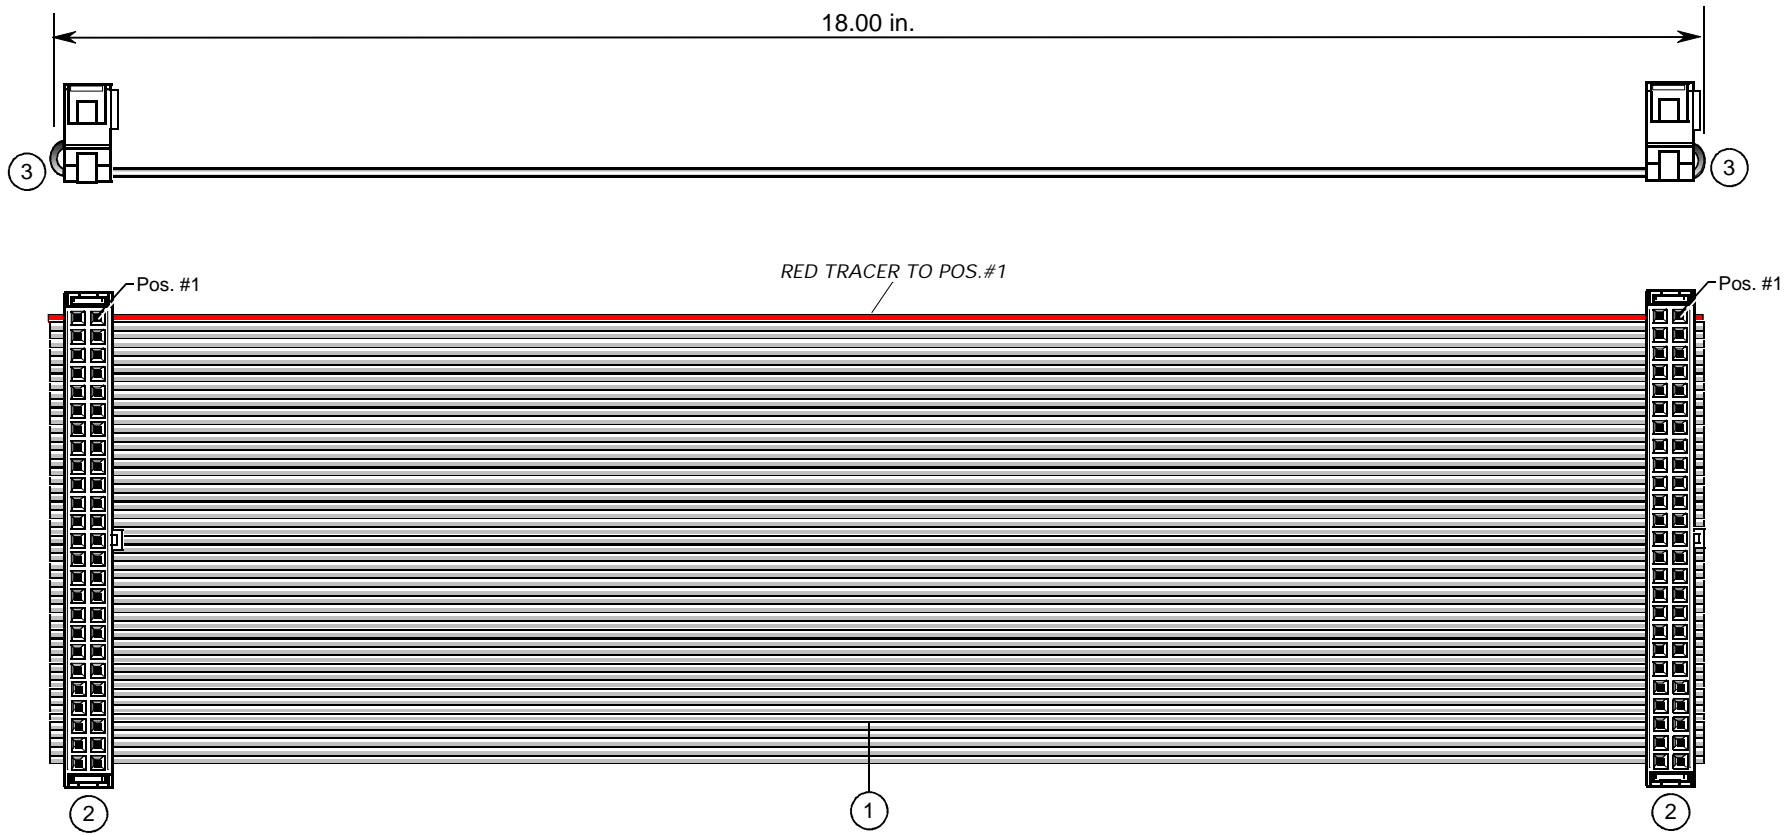

TOLERANCES ARE:  
 FRACTIONS-DECIMALS- ANGLES  
 +/- .X +/- .XX, .XXX +/- X°  
 +.25/- .00

**Note:** • All finished assemblies are to be 100% electrically tested for polarity and continuity.

• Materials		
L/I	Description	Quantity
①	Cable : <i>Hung Fu</i> , PVC Stranded, 50 conductor, 28 AWG, .050 CTRS.	A/R
②	Connector : <i>Offshore</i> , IDC50 position, female, polarized.	2
③	Strain Relief : <i>Offshore</i> , 50 position.	2



6086 Stewart Ave.  
 Fremont, CA 94538  
 Phone  
 1.800.777.6687

M.A. Illustration No. <b>CR2501-018</b>	Initial Release Date: 01-11-2002
Customer Part No.	Cust. Rev.: <b>N/A</b>
Description: Internal cable assembly: (2) IDC50, pos. female. 18.00 in.	
Technical illustrator: <b>RICHARD O'NEALS</b>	E.C.O. #
<b>APPROVED</b>	Rev. Date:
Approval _____ Date 01-11-2002	M.A. Rev: <b>A</b>

\*If this specification is approved and the first article waived, then the responsibility for fitness of the product is accepted by the customer (provided the product complies with this spec.).