



*Customer Approval: _____ First Article: Required Waived

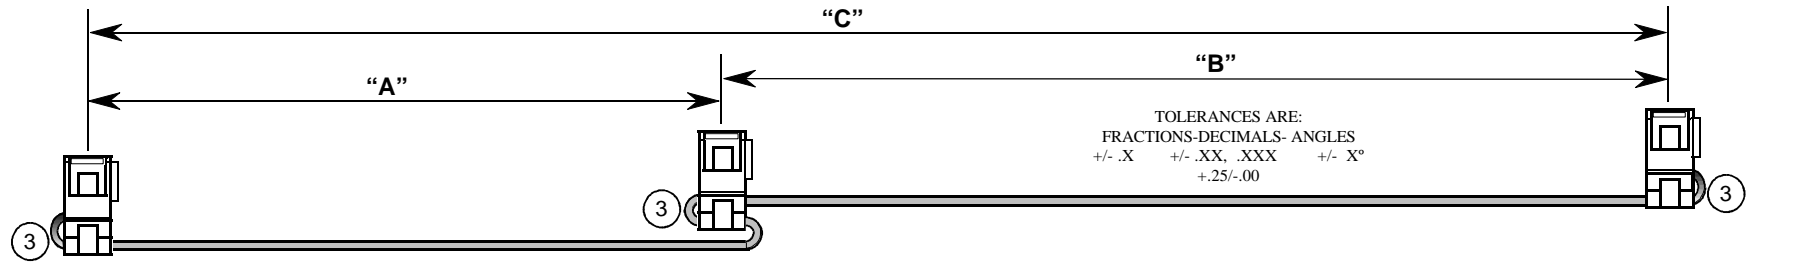

TOLERANCES ARE:
 FRACTIONS-DECIMALS- ANGLES
 +/- .X +/- .XX, .XXX +/- X°
 +.25/- .00

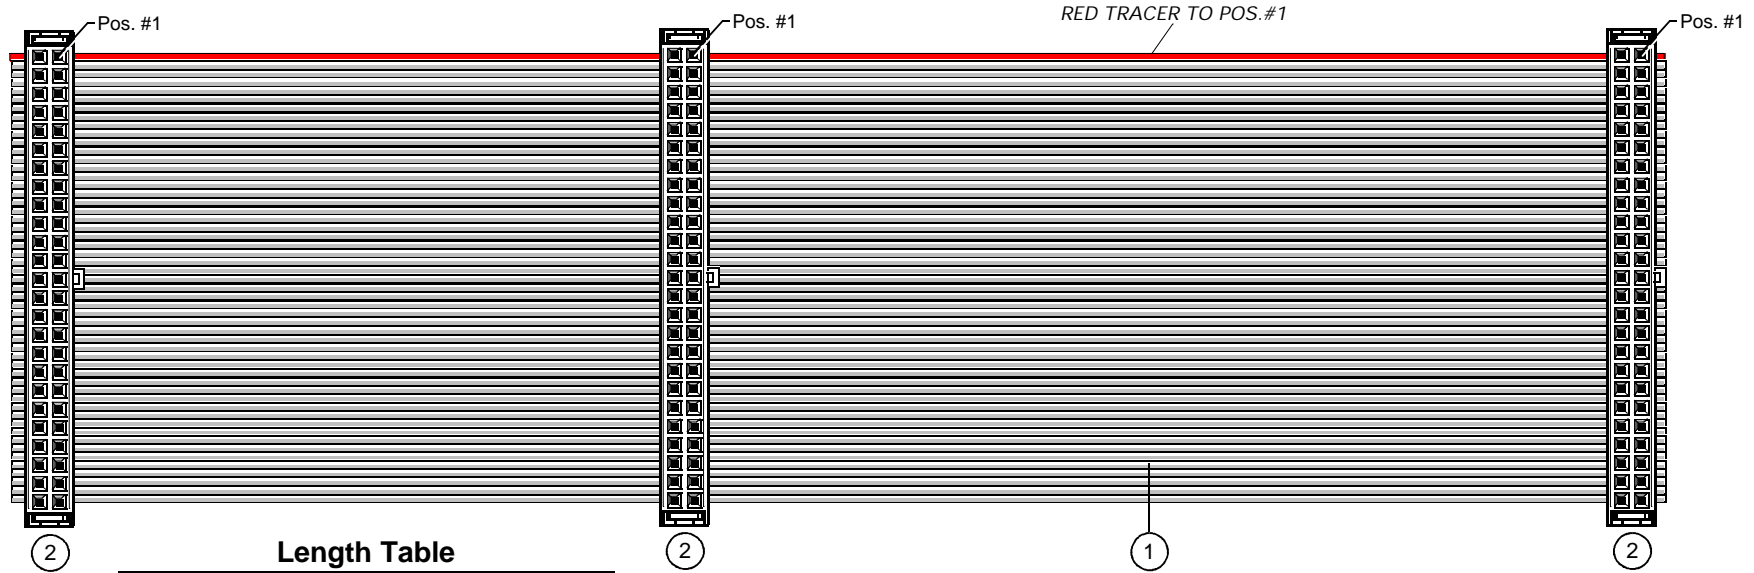

Length Table

"XXX" Number	"A"	"B"	"C"
CR2502-024	6.00 in.	18.00 in.	24.00 in.
CR2502-036	12.00 in.	24.00 in.	36.00 in.

Note: • All finished assemblies are to be 100% electrically tested for polarity and continuity.

• Materials

L/I	Description	Quantity
①	Cable : <i>Hung Fu</i> , PVC Stranded, 50 conductor, 28 AWG, .050 CTRS.	A/R
②	Connector : <i>Offshore</i> , IDC50 position, female, polarized.	3
③	Strain Relief : <i>Offshore</i> , 50 position.	3



6086 Stewart Ave.
 Fremont, CA 94538
 Phone
 1.800.777.6687

M.A. Illustration No. CR2502-XXX	Initial Release Date: 01-11-2002
Customer Part No.	Cust. Rev.: N/A
Description: Internal cable assembly: (3) IDC50, pos. female.	
Technical illustrator: RICHARD O'NEARRES	E.C.O. #
APPROVED	Rev. Date:
Approval _____ Date 01-14-2002	M.A. Rev: A

*If this specification is approved and the first article waived, then the responsibility for fitness of the product is accepted by the customer (provided the product complies with this spec.).